




# Embedded Stand-Alone High Resolution DVR

## H.264 Compression Chip

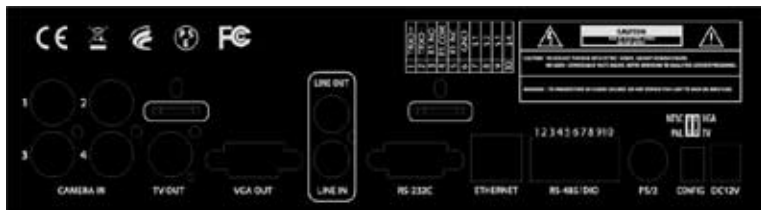

Model #: H.4

Video Mode	NTSC	PAL
O/S	Embedded Linux	
Compression	Standard H.264 / ADPCM(Audio)	
Video Input	4Ch	
Video Output	Monitor(1 BNC, 1 VGA)	
[Speed] Live Display	120fps	100fps
[Speed] Recording	120fps	100fps
Recording Resolution	Full (704 X 480)	Full (704 X 576)
	Field (704 X 240)	Field (704 X 288)
	CIF (352 X 240)	CIF (352 X 288)
Live Display	1/4/Sequence	
Recording mode	Auto, Continuous, Motion, Sensor	
Audio	Input (1 Ch), Output (1 Ch)	
Sensor/Relay/PTZ interface	Sensor input(4Ch), Relay output(1Ch), RS485	
HDD Capacity	1 SATA HDD (Max.500GB)	
Back up	USB 2.0, Network	
Language	English, Dutch, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, S. Chinese, T. Chinese, Turkish	
Network	xDSL, Cable Modem, LAN(Ethernet 10/100 base-T )	
Power Supply	DC 12V/5A	
Power Consumption	25W	
Weight	2.5Kg	
Operating Temperature	5~40°C or 41~104°F	
Dimension	250(W) X 65(H) X 155(D)mm or 9.84 x 2.56 x 6.10 inches	
Certification	CE, FCC, RoHS compliance	



201 North Elm Street • Kemp, Texas 75143  
 1-866-301-CCTV • 903-498-3240 • fax: 903-498-8989  
[www.rugged-cctv.com](http://www.rugged-cctv.com)